




Proceedings of 11rd International Conference

ANTENNA THEORY AND TECHNIQUES

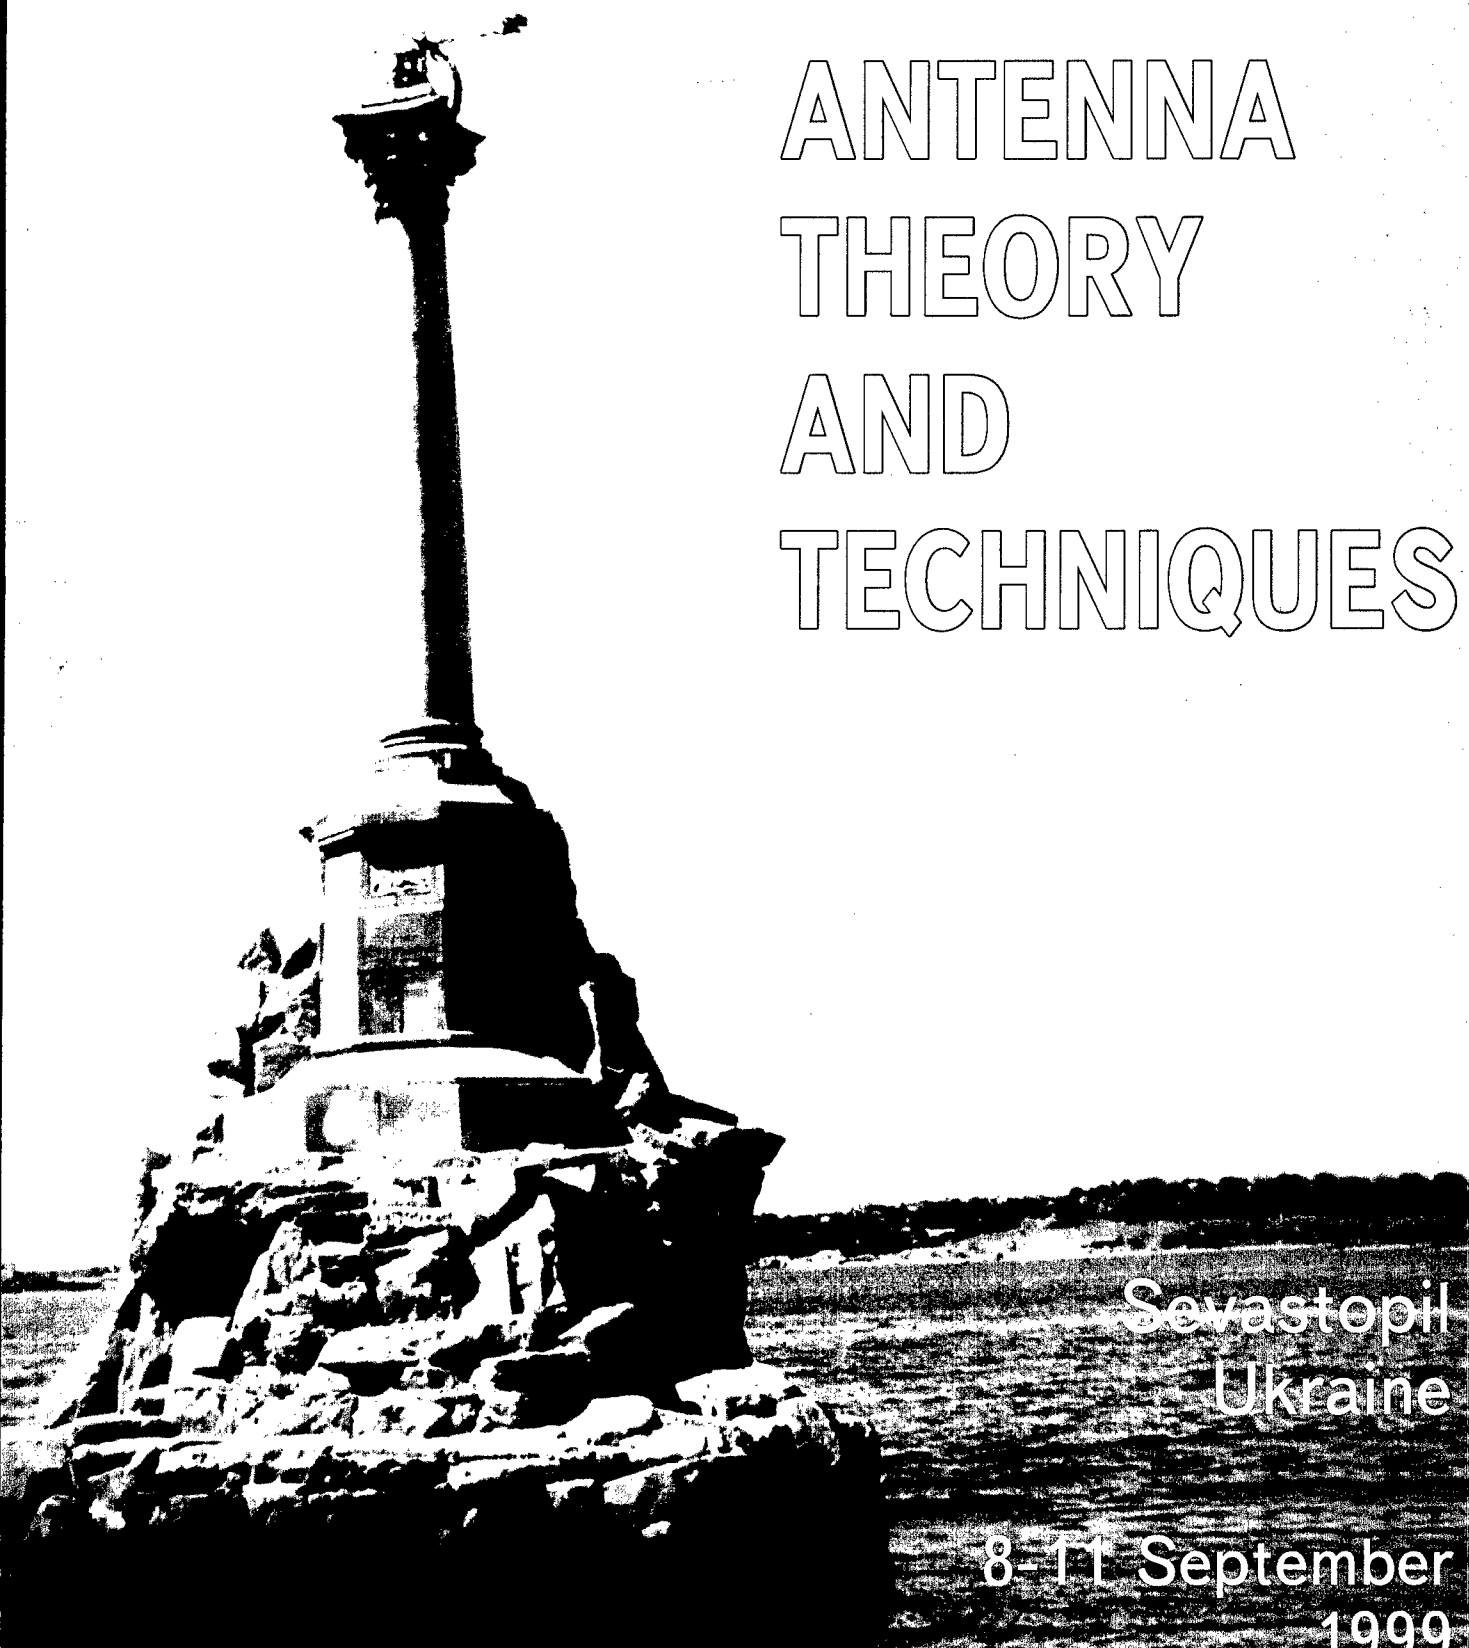

Sevastopol
Ukraine

8-11 September
1999

Third International Conference on

Antenna Theory and Techniques

8-11 September 1999

Organizers

National Antenna Association of Ukraine

National Technical University of Ukraine "Kyiv Polytechnic Institute"

IEEE AP/MTT/AES/ED/LEO/GRS-SS East Ukraine Joint Chapter

Sevastopol State Technical University

Venue

20000113 105

Sevastopol State Technical University

Sevastopol, Ukraine

CO-ORGANIZERS AND CO-SPONSORS

STATE COMMITTEE OF UKRAINE ON SCIENCE AND INTELLECTUAL PROPERTY

KHARKIV TECHNICAL UNIVERSITY OF RADIO ELECTRONICS

TERA LTD. (KYIV)

COMPANY "VEBER" (SEVASTOPIL)

ROMSAT LTD. (KYIV)

TERNOPIL STATE DESIGN BUREAU "PROMIN" (TERNOPIL)

*We wish to thank the following for their contribution
to the success of this Conference:*

IEEE REGION 8 OFFICE

US AIR FORCE EUROPEAN OFFICE OF AEROSPACE R&D

OFFICE OF NAVAL RESEARCH INTERNATIONAL FIELD OFFICE

Proceedings of the Third International Conference on Antenna Theory and Techniques
ISBN 966-622-012-1

This material is based upon work supported by the European Office of Aerospace Research and Development, Airforce Office of Scientific Research, Airforce Research Laboratory under Contract No. F 61775-99-WF071.

This work relates to Department of the Navy Grant N 00014-99-1-1033 issued by the Office of Naval Research International Field Office. The United States has a royalty-free license throughout the world in all copyrightable material contained herein.

ANTENNA ARRAYS

- 204 **Underground phased antenna arrays as alternative to mast aerials of receiving radio**
S. M. Alekseev, A. V. Makaseev, A. G. Poshkov, B. V. Sosunov, N. G. Fitenko (St. Petersburg, Russia)
- 206 **The analytical approach to the computing of resonance effects for the diffraction at well reflecting gratings**
N. A. Balakhonova, A. V. Kats, I. S. Spevak (Kharkiv, Ukraine)
- 209 **Two-dimensional image retrieval**
K. P. Gaikovich, A. V. Zhilin (Nizhny Novgorod, Russia)
- 212 **Active phased antenna arrays radiating LFM pulse packet**
V. L. Gostuykhin, V. N. Trusov, A. V. Gostuykhin (Moscow, Russia)
- 214 **Limiting resolution of Capon method for correlated sources**
A. A. Kirillov, G. V. Serebryakov (Nizhny Novgorod, Russia)
- 217 **The accuracy of joint estimation of signal parameters of the antenna arrays in the case of non-gaussian interference**
Y. P. Kunchenko, V. A. Danyk, T. V. Prokopenko (Cherkassy, Ukraine)
- 219 **Apodization functions for antenna arrays with constructive-technological restrictions**
V. V. Lukin, A. V. Kabanov, N. N. Ponomarenko (Kharkiv, Ukraine)
- 222 **Coherence-reduced signal processing in large arrays**
A. Malekhanov (Nizhny Novgorod, Russia)
- 225 **Power optimization of the beam shared-forming monopulse arrays**
B. D. Manuilov, P. N. Bashly (Rostov-on-Don, Russia)
- 228 **Diagnostics of receiving hydroacoustic antenna arrays**
D. A. Orlov And V. I. Turchin (Nizhny Novgorod, Russia)
- 230 **Simulation of antenna array characteristics impact on objects image restoration**
I. Prudyus, L. Lazko, T. Holotyak (Lviv, Ukraine)
- 233 **Simulation of spatial-time signal processing in imaging systems with synthetic aperture**
I. N. Prudyus, A. T. Synyavskyy, V. P. Ostap (Lviv, Ukraine)
- 237 **Optically or electronically steerable mm-wave phased antennas array based on semiconductor structure**
V. Ya. Rogov, A. Yu. Grinev, A. E. Zaikin (Moscow, Russia)
- 239 **Pattern synthesis of antenna array with digital phase shifters**
N. V. Shcherbakov, I. V. Norinchuk (Kharkiv, Ukraine)
- 241 **The matrix models of digital antenna arrays with nonidentical channels**
V. I. Slyusar (Kyiv, Ukraine)
- 244 **A way of correction of DAA receiving channels characteristics using the heterodyne signal**
V. I. Slyusar (Kyiv, Ukraine)
- 246 **Analysis of the effect of geometric parameters of nonequidistant antenna array with unequal amplitude distribution on its working frequencies range**
S. I. Starchenko, A. Yu. Milovanov, I. V. Pleshivtsev (Tambov, Russia)

| | | | |
|--------------------------|---------------|-------------------------|---------------|
| Ogorodnijchuk L. D. | 461, 464 | Samokhvalov A. | 145 |
| Omarov M. A. | 547 | Santachiara V. | 46 |
| Onufrienko V. M. | 131, 160 | Savchenko A. N. | 350 |
| Orlenko A. A. | 133 | Savelyev A. N. | 290 |
| Orlov D. A. | 228 | Savenko P. | 135, 187 |
| Orlova L. V. | 324 | Savochkin A. A. | 198 |
| Ostap V. P. | 233 | Sazonov D. M. | 69, 480 |
| Ovsyanikov V. V. | 341, 541 | Schekaturin A. A. | 435 |
| Panchenko A. Y. | 496 | Sedelnikov I. E. | 550 |
| Panteleev A. V. | 374 | Sedelnikov Y. E. | 553 |
| Parkhomenko M. P. | 520 | Sedyshev P. Y. | 293 |
| Pasnak L. | 135 | Sedyshev Y. N. | 72, 293 |
| Peretyatko T. V. | 108 | Seleznyov A. V. | 348 |
| Perfilov O. Ju. | 423 | Semenikhina D. V. | 526 |
| Perov A. O. | 395 | Serebryakov G. V. | 214 |
| Petrov B. M. | 432 | Sestroretsky B. V. | 350, 528 |
| Petrusenko I. V. | 539, 541 | Sevsky S. V. | 562 |
| Phomushkin S. P. | 176 | Shatrov A. D. | 122 |
| Pivnenko S. N. | 119, 387 | Shatskiy V. V. | 162, 358 |
| Plahov Y. M. | 127, 129 | Shcherbakov A. S. | 534 |
| Platonov S. Y. | 95 | Shcherbakov N. V. | 239 |
| Pleshitsev I. V. | 246 | Shehalev M. A. | 85 |
| Pochanin G. P. | 392 | Shifrin Y. S. | 148, 297, 468 |
| Podlevskiy B. | 187 | Shigesawa H. | 80 |
| Poedinchuk A. Ye. | 368 | Shishkova A. V. | 324 |
| Poldin O. V. | 284 | Shmat'ko A. A. | 498 |
| Polyakov S. Y. | 282 | Shokalo V. M. | 148, 559, 562 |
| Polyarus A. V. | 138 | Shostko I. S. | 565 |
| Ponomarenko N. N. | 219 | Shostko O. S. | 565 |
| Ponomarev L. I. | 140 | Shostko S. N. | 565 |
| Popovsky V. V. | 276 | Shrenk A. E. | 400 |
| Porshnev S. V. | 465 | Shumljansky I. I. | 304, 326 |
| Poshkov A. G. | 204 | Shvelidze R. R. | 363 |
| Posniy O. A. | 335 | Sibruk L. V. | 453, 573 |
| Potapova O. V. | 553 | Silaev A. M. | 284 |
| Prokopenko T. V. | 217 | Sirenko Yu. K. | 395 |
| Protsenko M. B. | 335, 344, 346 | Sivov A. N. | 122 |
| Prudyus I. N. | 230, 233 | Slyozkin V. G. | 331 |
| Pynylo V. S. | 201 | Slyusar V. I. | 241, 244 |
| Radtzig Yu. Yu. | 143, 311, 413 | Smirnov S. A. | 104 |
| Razdorkin D. Y. | 190 | Smirnov Yu. G. | 150 |
| Rensh Y. A. | 397 | Sokolov A. | 299, 301, 410 |
| Repa F. M. | 568 | Sosunov B. V. | 204 |
| Robert B. | 46 | Spevak I. S. | 206 |
| Rodyushkin K. V. | 269 | Starchenko S. I. | 246 |
| Rogov V. Ya. | 237 | Stepanenko P. Ya. | 492 |
| Romanenko M. V. | 190 | Stepanov A. S. | 173 |
| Rosa A. | 46 | Stepanov L. N. | 353 |
| Rozvadovsky A. F. | 337 | Sukharevsky I. V. | 408 |
| Rud' L. A. | 499, 502, 522 | Sukharevsky O. I. | 152 |
| Rudakov V. I. | 192, 195, 556 | Synepoop A. V. | 248 |
| Russo P. | 46 | Synyavskyy A. T. | 233 |
| Ryabuha V. P. | 266 | Syrotyuk V. H. | 201 |
| Ryabukhin A. A. | 496 | Talalaevskii V. M. | 515 |
| Rybalko A. M. | 248, 562 | Tankov I. V. | 346 |
| Sadekov T. A. | 3, 482, 487 | Tarasov V. B. | 1 |
| Saltykov D. Yu. | 312, 571 | Tarshin V. A. | 266 |
| | | Terent'ev J. M. | 155 |
| | | Tereshchenko V. M. | 382 |

A WAY OF CORRECTION OF DAA RECEIVING CHANNELS CHARACTERISTICS USING THE HETERODYNE SIGNAL

V. I. Slyusar

Central Research and Development Institute of Armament and Military Engineering,
Kiev-135, Andrushenko Str., 4, tel. 271-62-45

Usually a problem of correction of a digital antenna array (DAA) channels characteristics is solved by applying an external pilot-signal or additional diversing of control signal with respect to radio frequency.

To minimize the hardware expenditures it is proposed to use unnominal heterodyne operational mode, which consists in changing the excitation conditions in a control period so to cause the generation of parasitic broadband or multimode signals. At the same time it is necessary to provide stable arising of intermediate frequency oscillation at mixer's output. In the event of a narrow pass band of intermediate frequency amplifiers such signal is quite suitable for equalization of complex transfer characteristics of receiving channels.

As a correction procedures it is proposed to use a method [1], according to which the correction process is consisted in weighing the digital voltages in receiving channels be complex weight coefficients which quadratic components have been calculated for a set of N readings

$$\alpha_{rq}^c = \frac{\sum_{i=1}^N V_{rq_i}^c a_i^c + \sum_{i=1}^N V_{rq_i}^s a_i^s}{RQ \sum_{i=1}^N \left(V_{rq_i}^{c^2} + V_{rq_i}^{s^2} \right)},$$

$$\alpha_{rq}^s = \frac{\sum_{i=1}^N V_{rq_i}^c a_i^s - \sum_{i=1}^N V_{rq_i}^s a_i^c}{RQ \sum_{i=1}^N \left(V_{rq_i}^{c^2} + V_{rq_i}^{s^2} \right)},$$

where α_{rq}^c , α_{rq}^s — quadratic components of correction coefficient of the rq th primary DAA channel situated in the r th row of q th column,

$$V_{rq_i}^c = U_{rq_i}^c \cos(x_r + x_q) + U_{rq_i}^s \sin(x_r + x_q)$$

$$V_{rq_i}^s = U_{rq_i}^s \cos(x_r + x_q) - U_{rq_i}^c \sin(x_r + x_q)$$

$$x_r = \frac{2\pi}{\lambda} d_r \left(r - \frac{R+1}{2} \right) \sin \beta \cdot \cos \varepsilon$$

$$x_q = \frac{2\pi}{\lambda} d_q \left(q - \frac{Q+1}{2} \right) \sin \beta \cdot \sin \varepsilon$$

$U_{rq_i}^c$, $U_{rq_i}^s$ — quadratic components of response of the rq th primary DAA channel in the i th time interval, x_r , x_q — generalized coordinates of calibrating source with respect to DAA normal, λ — wavelength of calibrating source carrier, d_r , d_q — the distance between array's elements in a row and in a column correspondingly, R , Q — number of array's elements in a row and in a column, β , ε — angle coordinates of the calibrating source with respect to DAA normal,

$$a_i^c = \frac{1}{RQ} \sum_{r=1}^R \sum_{q=1}^Q \left\{ U_{rq_i}^c \cos(x_r + x_q) + U_{rq_i}^s \sin(x_r + x_q) \right\},$$

$$a_i^s = \frac{1}{RQ} \sum_{r=1}^R \sum_{q=1}^Q \left\{ U_{rq_i}^s \cos(x_r + x_q) - U_{rq_i}^c \sin(x_r + x_q) \right\}.$$

In the considered case the expressions for the correction coefficients can essentially become simpler if the calibrating source (heterodyne) is placed in the array plane.

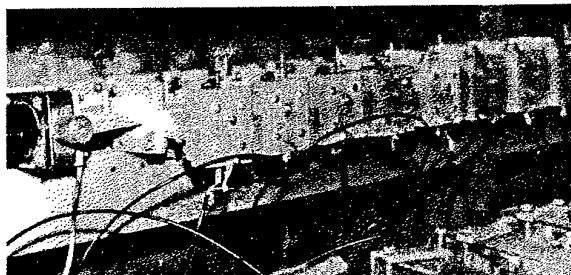


Fig. 1

The proposed approach has been tested on a working model of the 8-element digital antenna array made in 1989 by a team of scientists of the former Academy of Anti-aircraft Defence of Ground Forces (Kiev) headed by Dr. Sci. Prof. V.A.Varjukhin. An appearance of model's elements is shown in Fig. 1-4. Fig. 1 shows a microwave part of the array with a heterodyne block (to the left). A set of the digital receiving modules is shown in Fig. 2 (to the left). Fig. 3 shows the outputs of digital filters of quadratures diversing, from which signals are applied to a buffer storage and adapter of the central computer (Fig. 4).

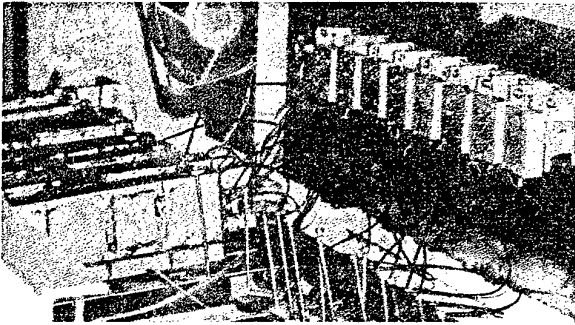


Fig. 2

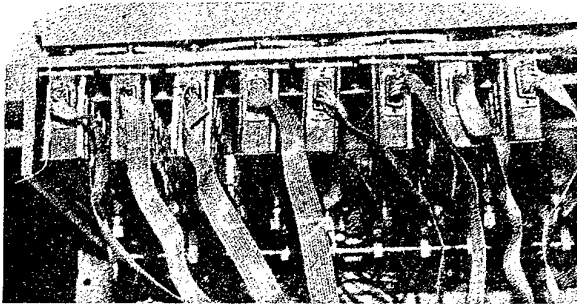


Fig. 3

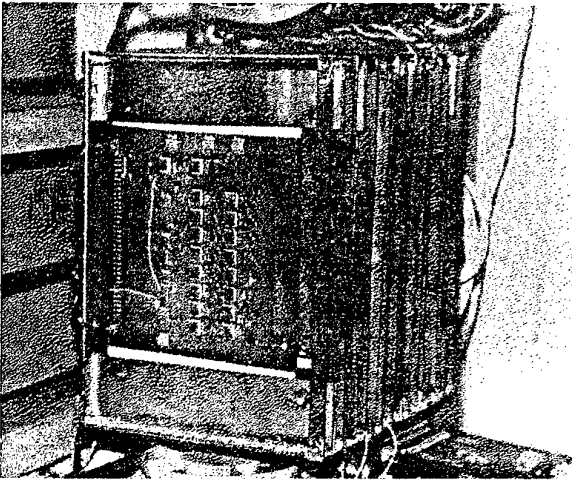


Fig. 4

REFERENCES

1. Patent of Russ. Fed. N 2103768 H 01 Q3/36, G 01 R 29/10. A way of amplitude-phase characteristics correction of primary channels of plane digital antenna array. Slyusar V.I., Pokrovskij V.I., Sakhno V.F., priority 16.10.92, publ. 27.01.98.

The experimental results have confirmed the effectiveness of the proposed method of prompt correction. But however, the problem of technological optimization of reliable heterodyne changing over into unnominal operational mode and its reset requires further investigations.